

ALUCODUAL[®]

ENGINEERED SOLID SHEETS

Superior Flatness, Durability and Aesthetics



3A
COMPOSITES



ABOUT US

As a global leader in composite materials, with its head office in Switzerland, affiliated with Schweizer Technologies Group, 3A Composites employs more than 4400 people in Europe, America and Asia. Presently, 3A Composites is a house of 20+ leading brands in their respective material and application categories. Among them, the flagship product lines used in architectural applications are:

ALUCODUAL® Engineered Solid Sheets (cladding & curtain walls, interior walls, ceilings, soffits & column decoration)

ALUCOLUX® Solid Aluminium Sheets (cladding & curtain walls, interior walls, ceilings, soffits & column decoration)


ALUCOBOND® Aluminium Composite Material (cladding & curtain walls, interior walls, ceilings & column decoration)

ALUCORE® Aluminium Core Panels (cladding & curtain walls, roofing & ceilings)

THE PRODUCT

ALUCODUAL® is a pre-coated engineered solid sheet comprising 2/3 layers of laminated aluminium skins. This ensures superior flatness, which is challenging to achieve with standard post coated solid sheets.

The product undergoes a multi-coat, multi-bake process on a continuous industrial-grade coil coating line, utilizing the highest grade of fluorocarbon based PVDF/FEVE paint system as per AAMA 2605 superior performance specification for exterior to ensure long-term performance and durability.

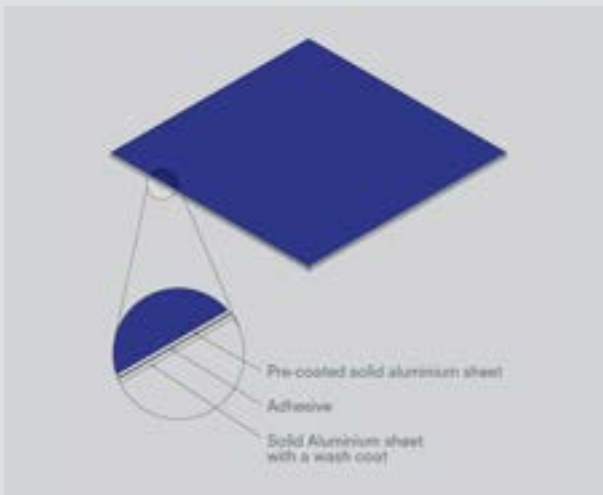

PRODUCT RANGE:

- Thickness:
ALUCODUAL® - 2mm, 2.5mm and 3mm
- Width: 1250mm, 1500mm
- Length: \leq 6000mm
-

In comparison to a single sheet of aluminum of the same thickness, ALUCODUAL® panels offer enhanced stiffness and rigidity. This structural stability allows for their use in larger cassettes and panels, effectively reducing number of joints and overall costs. Additionally, the material's workability in achieving 3D shapes and complex geometric patterns makes it highly versatile for various architectural applications.

One of the key features of ALUCODUAL® is its fire-retardant property. Since it doesn't have a thermo-plastic core, it remains inactive in the event of a fire, emitting no toxic gases or burning droplets. It is classified as Class A2-s1, d0 according to EN-3501-1 test standard, and ISO5660.1-2015 making it suitable for projects with stringent fire safety requirements.




ALUCODUAL® is used for facades, wall cladding, soffits, column cladding and decorative interior walls in various projects like airports, stadiums, malls and residential buildings. It fulfills fire safety needs while providing flexibility, making it a reliable choice for architects and designers to create visually appealing facades.

WIND LOAD AND PERMISSIBLE PANEL SIZES

The diagram indicates the available range of panel sizes and permissible range lengths at a given panel width, depending on the wind load applied.

The diagram apply to panels supported on four sides (corners fixed).

Dimensional values for other systems are available on request.

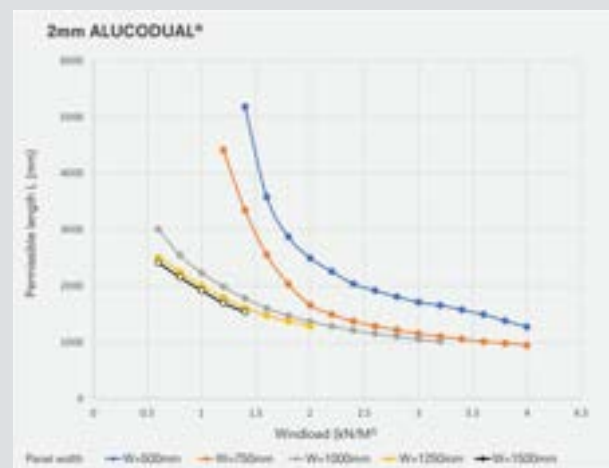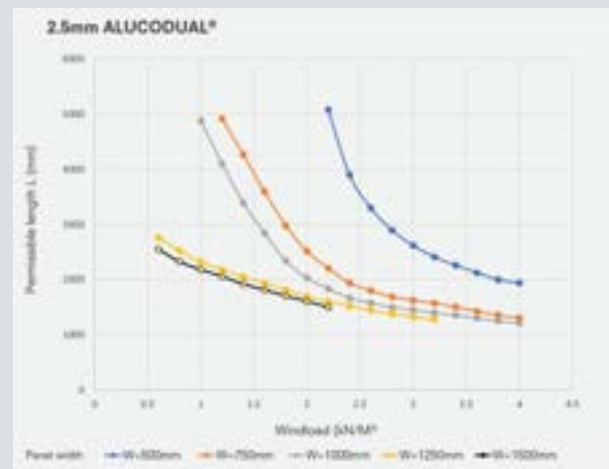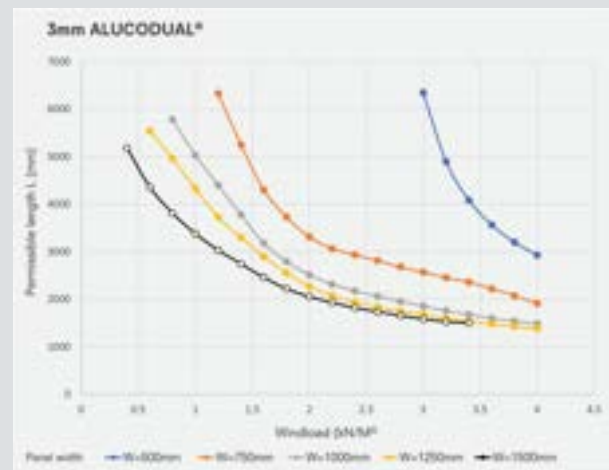

LEED CERTIFICATION

The LEED program has gained much recognition over the past several years and is now the premier sustainability design tool in the building industry. LEED focuses on constructing buildings that

have minimal impact on the environment during construction and occupation and acknowledges that using recycled materials is an essential part of reducing environmental deterioration.

Material	Recycled % Pre-Consumer	Recycled % Post-Consumer	LEED Contribution (1.0 x Post + 0.5 x Pre)
ALUCODUAL®	20%	20%	30%

REASONS TO CHOOSE ALUCODUAL®



Perfect flatness

ALUCODUAL® undergoes a lamination process that enhances its flatness compared to a single solid aluminium sheet. Specifically chosen alloy and temper for architectural applications ensure remarkable flatness in the finished product.



Colour consistency

High quality fluorocarbon based PVDF/FEVE coating on a continuous industrial grade coil-coating line conforming to AAMA 2605 and ECCA guidelines.



Fire retardant

A non-combustible panel that has successfully passed ISO5660.1-2015 and achieved fire classification Class A2-s1, d0 according to EN 13501-1 test standards.



Formability

Solid and rigid, yet highly formable, ALUCODUAL® can be easily worked with and transformed into intricate shapes and 3D patterns using standard processing methods.



Range of colours

With a vast range of colours and surface finishes, ALUCODUAL® provides a large variety for you to choose from. Wood, stone and concrete patterns are also possible.



Technical support

For recommendations and the design of appropriate fixing systems, as well as any other assistance you may need, the Building Agency team is here to support you.



Recyclability

ALUCODUAL® is 100% recyclable material.




Warranty

ALUCODUAL® comes with a 15-year warranty.

FIXING SYSTEMS


ROUTE AND RETURN

The technique, called the routing and folding method, enables a fabricator to produce shapes of various kinds of sizes. A V-shaped or rectangular groove is routed on the reverse side of the ALUCODUAL® panel.

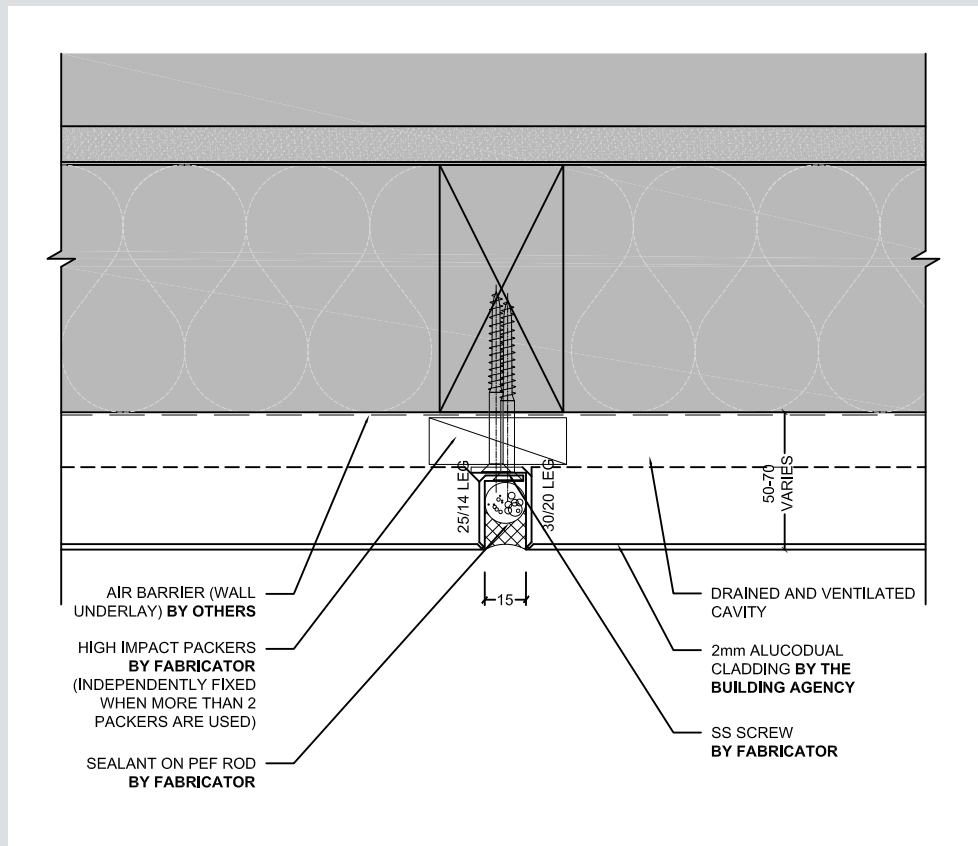

WAB SYSTEM

The WAB cladding system comprises of a fixing system manufactured from extruded aluminium and stainless steel fixing components.

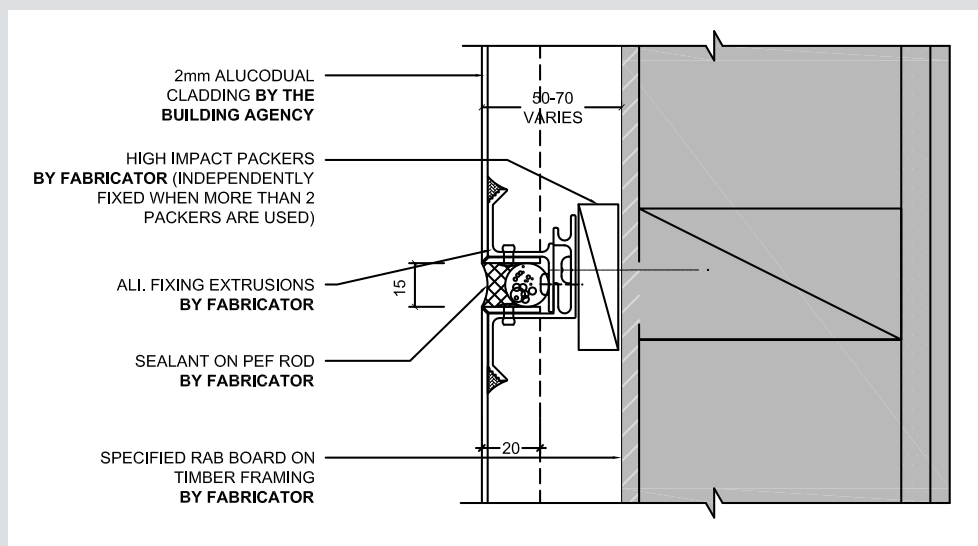

TECHNICAL DATA

PROPERTIES	STANDARDS	UNIT	VALUES
Panel Standard Thickness	Nominal	[mm]	2 / 2.5 / 3
Panel Standard Width	Nominal	[mm]	1250 / 1500
Panel Weight	Nominal	[kg/m ²]	5.4 / 6.8 / 8.1

TECHNICAL PROPERTIES

Rigidity		[kNcm ² /m]	500 / 1000 / 1700
Modules of Elasticity	ASTM E8	[N/mm ²]	70000
Alloy of Cover Sheet	ASTM B 209		5005
Temper of Cover Sheets	ASTM B 209		H24
Tensile Strength of Aluminium	ASTM E8	[MPa]	≥ 145

SURFACE:

Lacquering			Coil Coating Pre coated PVDF/ Specially treated coating
Gloss (Initial Value)	ASTM D523		As per the colour shade

DIMENSIONAL TOLERANCES:

Panel Thickness		[mm]	± 0.15mm
Weight		[mm]	± 10%
Length		[mm]	+ 6 mm

Specifications are subject to change without prior notice / intimation.



CLEANING & MAINTENANCE

Annual cleaning is recommended. The surfaces should be cleaned either manually using a soft brush or by means of a high-pressure cleaner (maximum 50 bar) with clean water. If necessary, a mild cleaning agent (pH 6-7) may be added up to a maximum of 10%. Cleaning should take place from top to bottom. After cleaning, rinse with clean water to remove any cleaning agent residue. Do not clean surfaces heated by the sun (>40°C).

Do not use highly alkaline cleaning agents such as potassium hydroxide, sodium carbonate, caustic soda, any strong acid products or highly abrasive cleaning agents such as household cleaning products that can corrode the paint.

STORAGE & TRANSPORTATION

To protect ALUCODUAL® panels against mechanical damages and harmful effects of weather the following should be observed:

- Ensure careful handling of pallets during transport and unloading.
- Examine the pallets thoroughly upon arrival for any damages due to transportation.
- Stack only three pallets of similar dimensions horizontally above one another with the heaviest at the bottom. Do not let the panels stand vertically.





MATERIALS • SYSTEMS • SOLUTIONS

14a Link Drive Wairau Park Auckland
info@buildingagency.co.nz
www.thebuildingagency.co.nz

Next & Beyond. **ALUCOBOND®**

3A Composites Asia Pacific Pte. Ltd.

300 Beach Road
#10-06 The Concourse
Singapore 199555
Telephone: (65) 6303 9750
Telefax: (65) 6303 9751
Email: sales@alucobond.com.sg
www.alucobond.com.sg

3A Composites India Pvt. Ltd.

Bldg. No. 11, Unit No. 1112, 1st Floor
Solitaire Corporate Park
Mathuradas VasANJI Marg
Andheri (East)
Mumbai - 400 093, India
Telephone: (91) 22 4256 4500
Telefax: (91) 22 4010 4132
Email: alucobond.india@3acomposites.com
www.alucobond.in

3A Composites GmbH

Alusingenplatz 1
78224 Singen
Germany
Telephone: (49) 7731 941 2060
Telefax: (49) 7731 941 2845
Email: info@alucobond.com
www.alucobond.com

3A Composites Middle East (Branch)

Almas Tower, JLT
P.O. Box: 343522
Dubai, UAE
Mobile: (97) 1 58 535 1721
Email: basel.massis@3acomposites.com
www.alucobond.com

3A Composites (China) Ltd.

Room 1902-1903
Hongkong Prosperity Tower
Mengzi Road No. 763
Huangpu Shanghai
China
Telephone: (86) 21 6315 8550
Email: alucobond.china@3acomposites.com
www.alucobond.com.cn

3A Composites USA

721 Jetton Street, Suite 325
Davidson, NC 28036
United States of America
Tel: (1) 800 626 3365
Email: info.usa@3acomposites.com
www.alucobondusa.com

